



LOCKTON

COMMERCIAL HARDWARE

2020

Mechanical Locks

Knob Sets	Page:	4-5
Lever Sets	Page:	6-7
Mortice Locks & Furniture	Page:	8-10
Deadbolts	Page:	11
Screen Door Locks	Page:	12
Scar Plates	Page:	13-14

Padlocks

40mm Body	Page:	16
45mm Body	Page:	16
50mm Body	Page:	17
55mm Body	Page:	17
Shackles	Page:	18
Spares & Accessories	Page:	19

Lock Cylinders

Oval Cylinders	Page:	21
Round Cylinders	Page:	21
530 Cylinders	Page:	22
PD Cylinders	Page:	22
Trilock Cylinders	Page:	22
Euro Cylinders	Page:	22-23

Door Closers

Rack & Pinion	Page:	25-28
Cam Action	Page:	29-30
Spares & Accessories	Page:	31-32

Panic Bars

Standard	Page:	35-36
Wide	Page:	37-38
Spares & Accessories	Page:	39-40

Access Technology

12/24V Electronic Strike	Page:	42
DSW Automatic Swing Door System	Page:	43-44

Accessories

Key Tags	Page:	45-46
----------	-------	-------

Warranty

Page:	47
-------	----



LOCKTON

Mechanical Locks



LOCKTON Mechanical Locks are manufactured from high quality materials to ensure excellent durability.

Designed for commercial applications. You & your customers can be confident that LOCKTON products are made to withstand our harsh Australian environment

- Specifically designed for high traffic areas in commercial applications.
- As a result also suitable for domestic use.

The Mechanical Locks range are divided into 5 groups:

- **Knob Sets**
- **Lever Sets**
- **Mortice Locks**
- **Deadbolts**
- **Screen Door Locks**



Knob Locksets

KNOB LOCKSETS (GRADE 2)

3000 SERIES – GRADE 2 – HEAVY-DUTY KNOB LOCKSETS

PRODUCT SPECIFICATIONS

- Tested to meet Grade 2 specification of 400,000 cycles
- Retrofits All Australian & New Zealand key systems
- Concealed mounting screws
- Door thickness – 35mm-45mm standard
- Backset – 60mm standard
- Backset – 70mm standard
- Backset – 127mm also available (with extension tube)
- Strike – TStrike 28.2mm x 69.5mm standard
- Door prep – 54mm diameter cross bore
- Latch bolt – 12.7mm throw
- Latch faceplate – 25mm x 57mm standard
- Finish - Satin stainless steel

KEYING

- 6-pin C4 PD cylinder
- 2 keys per lockset

CERTIFICATION & WARRANTY

- Certified AS:1905
- Fire rated
- 3000 Series – Grade 2
- 5 year warranty*



Example Colour Coding

MODEL	EA3000-KD
FUNCTION	ENTRANCE SET
FINISH	SATIN STAINLESS STEEL
BACKSET	70 mm
DOOR THICKNESS	35-45 mm

ORDERING INFORMATION


cat.-no.	Description	Label colour coding
EA3000-KD	Entrance 70mm backset	Red
EA3000-60-KD	Entrance 60mm backset	Red
EA3011-KD	Double cylinder lock/unlock 70mm backset	Orange
EA3061-KD	Double cylinder vestibule set 70mm backset	Dark Red
EA3012-KD	Classroom 70mm backset	Yellow
EA3030	Privacy 70mm backset	Light Blue
EA3052	Half Set 70mm backset	Yellow
EA3062-KD	Storeroom 70mm backset	White
EA3062-60-KD	Storeroom 60mm backset	White
EA3075	Dummy Set 70mm backset	Pink
EA3082	Passage 70mm backset	Green
CC60-D-SS	Spare 60mm deadlatch	
CC70-D-SS	Spare 70mm deadlatch	
007-NA82906	Grade 2 cylindrical 70-127mm extension tube	



KNOB LOCKSETS (GRADE 2)

3000 SERIES – GRADE 2 – HEAVY-DUTY KNOB LOCKSETS

3000 Series

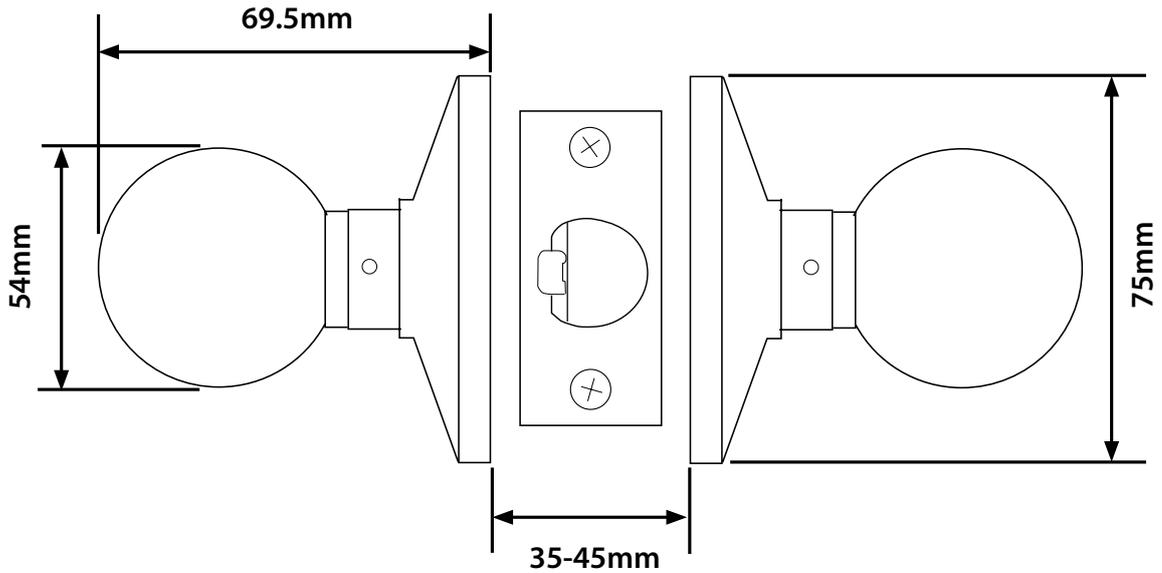

FUNCTION

cat.-no.		Description
EA3000 <i>Entrance</i>		Push-button locking; pushing button locks outside knob until unlocked by key or by turning inside knob. Inside knob is always free for immediate egress.
EA3011/3061 <i>Double Cylinder</i>		EA3011- Double Cylinder - Key locks/unlocks both knobs. EA3061- Double Cylinder - Knobs always locked, key retracts latch.
EA3012 <i>Classroom</i>		Key required to either lock or unlock outside knob. Inside knob is always unlocked and free for immediate egress.
EA3030 <i>Privacy</i>		Push-button locking. Can be opened from outside with a small screwdriver. Turning inside knob or closing door releases button. Inside knob is always free for immediate egress.
EA3052 <i>Latching Half Set</i>		Blank plate outside. Inside knob always unlocked and always free.
EA3062 <i>Storeroom</i>		Outside knob always locked. Entrance by key only. Inside knob unlocked and free for immediate egress.
EA3075 <i>Single Dummy</i>		Dummy trim for one side of the door. Used for door pull or as matching inactive trim. No mechanical operation. Surface-mounted single dummy trim.
EA3082 <i>Passage</i>		Both knobs always unlocked and always free for immediate ingress & egress.

Lever Locksets

LEVER LOCKSETS (GRADE 2)

6000 SERIES – GRADE 2 – HEAVY-DUTY LEVER LOCKSETS

PRODUCT SPECIFICATIONS

- Tested to meet Grade 2 specification of 400,000 cycles
- Concealed mounting screws
- Door thickness – 35mm-51mm standard
- Backset – 70mm standard
(60mm, 127mm available)
- Exposed trim – Pressure cast zinc, plated to match finish
- Strike – TStrike 28.2mm x 69.5mm standard
- Door prep – 54mm diameter cross bore
- Latch bolt – 12.7mm throw
- Latch faceplate – 25.4mm x 57 mm standard
- Finish – Satin chrome

KEYING

- 6-pin C4 PD cylinder
- 2 keys per lockset

CERTIFICATION & WARRANTY

- Certified AS:1905
- Fire rated
- 6000 Series – Grade 2
- 5 year warranty*



Example Colour Coding

MODEL	: EU6082
FUNCTION	: PASSAGE SET
FINISH	: SATIN CHROMIUM PLATED
BACKSET	: 70 mm
DOOR THICKNESS	: 35-51 mm

ORDERING INFORMATION


cat.-no.	Description	Label colour coding
EU6000-KD	Entrance 70mm backset	Red
EU6011-KD	Double cylinder lock/unlock 70mm backset	Orange
EU6012-KD	Classroom 70mm backset	Yellow
EU6030	Privacy 70mm backset	Light Blue
EU6052	Backsetting Half Set 70mm backset	Yellow
EU6061-KD	Institution Set 70mm backset	Dark Red
EU6062-KD	Storeroom 70mm backset	White
EU6079	Half Dummy 70mm backset	Pink
EU6082	Passage 70mm backset	Green
CC60-D-SS	Optional 60mm deadlatch	
007-NA82906	Optional Grade 2 cylindrical 70-127mm extension tube	
CC70-D-SS	Spare 70mm deadlatch	



LEVER LOCKSETS (GRADE 2)

6000 SERIES – GRADE 2 – HEAVY-DUTY LEVER LOCKSETS

6000 Series

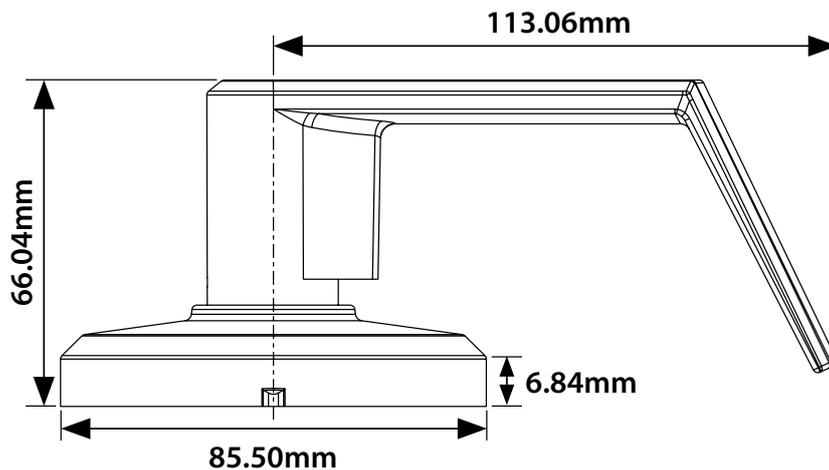

FUNCTION

cat.-no.		Description
EA6000 <i>Entrance</i>		Turn/push-button locking; pushing and turning button locks outside lever, requiring use of key until button is manually unlocked. Push-button locking; pushing button locks outside lever until unlocked by key or by depressing inside lever. Inside lever is always free for immediate egress.
EU6011/6061 <i>Double Cylinder</i>		EU6011- Double Cylinder - Key locks/unlocks both levers. EU6061- Double Cylinder - Lever always locked, key retracts latch.
EU6012 <i>Classroom</i>		Key required to either lock or unlock outside lever. Inside lever is always unlocked and free for immediate egress.
EU6030 <i>Privacy</i>		Push-button locking. Can be opened from outside with a small screwdriver. Turning inside lever or closing door releases button. Inside lever is always free for immediate egress.
EU6052 <i>Latching Half Set</i>		Blank plate outside. Inside lever always unlocked and always free.
EU6062 <i>Storeroom</i>		Outside lever always locked. Entrance by key only. Inside lever unlocked and free for immediate egress.
EU6079 <i>Half Dummy</i>		Dummy trim for one side of door. Used for door pull or as matching inactive trim. No mechanical operation. Surface-mounted single dummy trim.
EU6082 <i>Passage</i>		Both levers always unlocked and always free for immediate ingress & egress.


Mortice Locks

SG-SBML23

MORTICE LOCK - NARROW STILE

PRODUCT SPECIFICATIONS

- Stainless steel reversible latch
- Easy close action for electric strikes
- Uses industry std cams
- Includes adaptor
- Retrofits Australian standard 23mm mortice Locks
- Cycle tested to 500,000 openings
- Accepts Oval cylinder (Not supplied)

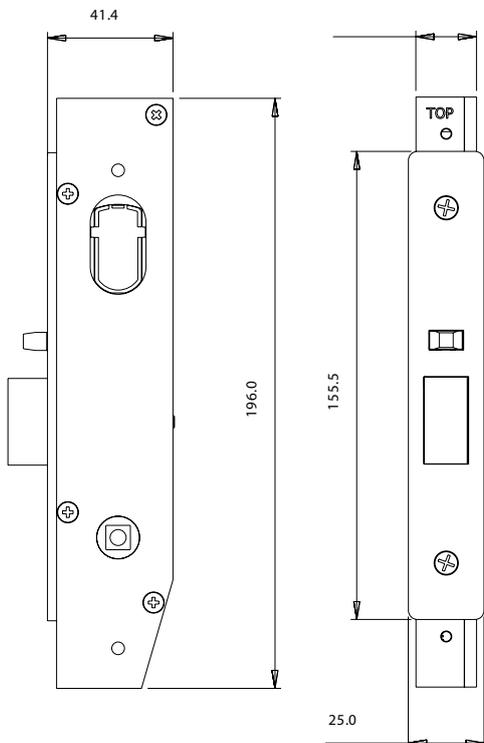

ORDERING INFORMATION

cat.-no.	Description	Finish
SG-SBML23	MORTICE LOCK Narrow Stile	Stainless Steel



Mortice Lock Furniture - Narrow

NSQ-01-25-SCP

WITH CYLINDER HOLE & LEVER

- Quality return spring
- Reversible handle action
- To fit Narrow Stile Mortice Locks
- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.	Description
NSQ-01C-25-SCP	External Plate
NSQ-01V-25-SCP	Internal Plate

NSQ-02-25-SCP

WITH LEVER ONLY

- Quality return spring
- Reversible handle action
- To fit Narrow Stile Mortice Locks
- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.	Description
NSQ-02C-25-SCP	External Plate
NSQ-02V-25-SCP	Internal Plate

NSQ-04C-SCP

EXTERNAL PLATE WITH CYLINDER HOLE ONLY

- To fit Narrow Stile Mortice Locks
- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.
NSQ-04C-SCP

NSQ-13V-25-SCP

INTERNAL PLATE WITH TURN SNIB & LEVER

- Quality return spring
- Reversible handle action
- To fit Narrow Stile Mortice Locks
- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.
NSQ-13V-25-SCP

Mortice Lock Furniture - Wide

SQ-01-25-SCP

WITH CYLINDER HOLE & LEVER

- Quality return spring
- Reversible handle action
- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.	Description
SQ-01C-25-SCP	External Plate
SQ-01V-25-SCP	Internal Plate

SQ-02-25-SCP

WITH LEVER ONLY

- Quality return spring
- Reversible handle action
- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.	Description
SQ-02C-25-SCP	External Plate
SQ-02V-25-SCP	Internal Plate

SQ-03C-25-SCP

**EXTERNAL PLATE
EMERGENCY TURN & LEVER**

- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.
SQ-03C-25-SCP

SQ-04C-SCP

**EXTERNAL PLATE
WITH CYLINDER HOLE ONLY**

- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.
SQ-04C-25-SCP

SQ-13V-25-SCP

**INTERNAL PLATE
WITH TURN SNIB & LEVER**

- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.
SQ-13V-25-SCP

SQ-53C-25-SCP

**EXTERNAL PLATE
WITH EMERGENCY TURN LEVER &
INDICATOR**

- Retrofits existing handles
- Square end
- Satin chrome finish



ORDERING INFORMATION

cat.-no.
SQ-53C-25-SCP



Deadbolts

DEADBOLTS (GRADE 2)

4000 SERIES – GRADE 2 – HEAVY-DUTY DEADBOLTS

PRODUCT SPECIFICATIONS

- Tested to meet Grade 2 specification of 400,000 cycles
- Solid housing provides enhanced strength and durability
- 25.4mm throwbolt with saw-resistant hardened steel roller pin
- Door thickness– 35 mm to 53 mm without spacer rings
- Backset – 60-70mm
- Strike – Standard deadbolt strike 32mm x 70mm
- Door prep – 54mm diameter cross bore
- Latch bolt – Full 25.4mm throw with hardened steel Pin
- Finish - Satin stainless steel

KEYING

- 6-pin C4 PD cylinders
- 2 keys per lockset

CERTIFICATION & WARRANTY



- Certified AS:1905
- 4000 Series – Grade 2
- 5 year warranty*



Single Cylinder



Double Cylinder

cat.-no.	Description
SGDB4010 <i>Single Cylinder</i>	 Key required to either lock or unlock bolt. Turning the inside turn lever to either lock or unlock bolt.
SGDB4011 <i>Double Cylinder</i>	 Key required to either lock or unlock bolt. Key required inside to either lock or unlock bolt.

Example Colour Coding	
MODEL	SGDB4010-KD
FUNCTION	SINGLE CYL. DEADBOLT
FINISH	SATIN STAINLESS STEEL
BACKSET	60-70 mm Adjustable
DOOR THICKNESS	35-45 mm

ORDERING INFORMATION

cat.-no.	Description	Label colour coding
SGDB4010-KD	Single cylinder Deadbolt SSS 60/70mm adjustable latch	
SGDB4011-KD	Double cylinder Deadbolt SSS 60/70mm adjustable latch	

Screen Door Locks

SGSL

SLIDING SCREEN DOOR LOCK

- Easily retro fits existing similar locks
- Suits left or right handed doors
- Internal locking snib
- Strong metal lock body construction
- Cylinders not Included



ORDERING INFORMATION

cat.-no.	Description	Colour
SGSL-BL	Sliding Screen Door Locks - Black	
SGSL-WH	Sliding Screen Door Locks - White	
SGSL-PR	Sliding Screen Door Locks - Primrose	

SGHI

HINGED SCREEN DOOR LOCK

- Easily retro fits existing similar locks
- Suits left or right handed doors
- Internal locking snib
- Strong metal lock body construction
- Cylinders not Included



ORDERING INFORMATION

cat.-no.	Description	Colour
SGHI-BL	Hinged Screen Door Locks - Black	
SGHI-WH	Hinged Screen Door Locks - White	
SGHI-PR	Hinged Screen Door Locks - Primrose	
SGHI-BR	Hinged Screen Door Locks - Brown	




Scar Plates

PS-201

SCAR PLATE

- 75x75 mm Plate
- 5 x Holes
- Suits 201 Style Patch/Repair




ORDERING INFORMATION

cat.-no.	Description	Material	Thickness (mm)
PS-201-SS	Suits 201 Style Patch/Repair	Stainless Steel	1.2
PS-201-AL	Suits 201 Style Patch/Repair	Aluminium	2.5

PS-WP

SCAR PLATE

- 195x75 mm Plate
- Mortice cut out
- Suits 3572-Wide plate style Patch/Repair
- SQ LOCKTON or equivalent mortice furniture

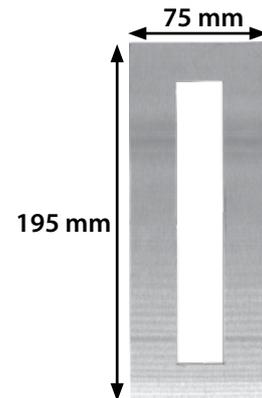


ORDERING INFORMATION

cat.-no.	Description	Material	Thickness (mm)
PS-WP-SS	Suits Wide plate Patch/Repair	Stainless Steel	1.2
PS-WP-AL	Suits Wide plate Patch/Repair	Aluminium	2.5

PS-NP

SCAR PLATE

- 200 x 36 mm Plate
- Mortice cut out
- Suits 3582- Narrow plate style Patch/Repair
- NSQ LOCKTON or equivalent mortice furniture

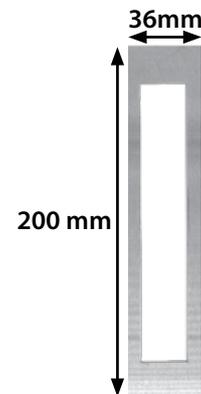

ORDERING INFORMATION


cat.-no.	Description	Material	Thickness (mm)
PS-NP-SS	Suits Narrow plate Patch/Repair	Stainless Steel	1.2
PS-NP-AL	Suits Narrow plate Patch/Repair	Aluminium	2.5

Blank Scar Plates

PB-75-75

BLANK SCAR PLATE

- 75x75 mm Plate
- Suits 201 Style Patch/Repair




ORDERING INFORMATION

cat.-no.	Description	Material	Thickness (mm)
PB-75-75-SS	Suits 201 Style Patch/Repair	Stainless Steel	1.2
PB-75-75-AL	Suits 201 Style Patch/Repair	Aluminium	2.5

PB-195-75

BLANK SCAR PLATE

- 195x75 mm Plate
- Suits 3572-Wide plate style Patch/Repair
- SQ LOCKTON or equivalent mortice furniture

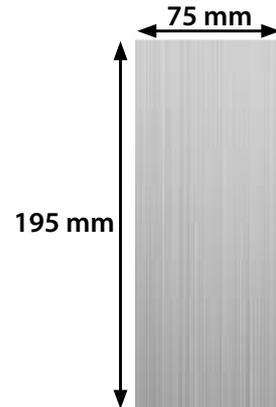


ORDERING INFORMATION

cat.-no.	Description	Material	Thickness (mm)
PB-195-75-SS	Suits Wide plate Patch/Repair	Stainless Steel	1.2
PB-195-75-AL	Suits Wide plate Patch/Repair	Aluminium	2.5

PB-200-36

BLANK SCAR PLATE

- 200 x 36 mm Plate
- Suits 3582- Narrow plate style Patch/Repair
- NSQ LOCKTON or equivalent mortice furniture

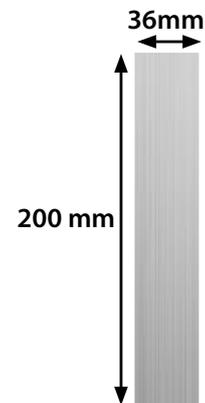

ORDERING INFORMATION

cat.-no.	Description	Material	Thickness (mm)
PB-200-36-SS	Suits Narrow plate Patch/Repair	Stainless Steel	1.2
PB-200-36-AL	Suits Narrow plate Patch/Repair	Aluminium	2.5



LOCKTON



Padlocks

Featuring a Solid brass body with Boron Alloy shackle, brass & stainless steel components, LOCKTON padlocks are made to be tough & durable, ideal for outdoor applications.

Optional Stainless Steel shackles are also available for extra corrosion protection.

Available in body sizes: 40mm / 45mm / 50mm / 55mm

- **Key Retain/Key Release**
All sizes can be configured to be 'Key Release' or 'Key Retain.'
- **Keyed Alike**
All sizes are available in keyed alike groups, or individually keyed (keyed to differ).
- **Restricted Systems**
All sizes are compatible with Restricted Keying Systems.





Padlocks

500/40

'COMPACT' PADLOCK

- Ideal for lockers, tool boxes and vending machines
- Solid 40mm brass body
- 6.35mm Ø Stainless Steel - Quick Change Shackle
- 6 pin C4 key way (in keyed models)
- Suits inline key systems

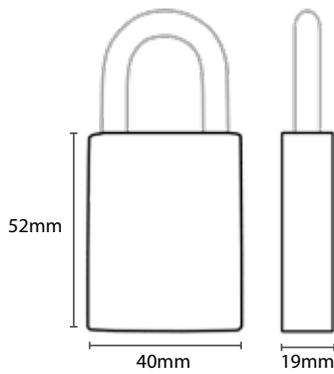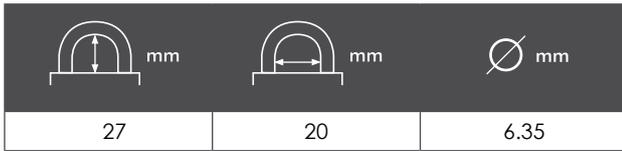



ORDERING INFORMATION

cat.-no.	Configuration
500/40-KD	Keyed to Differ
500/40-KA	Keyed Alike
500/40-ALB	Less Barrel
500/40-LBS	Less Barrel & Shackle

500/45

'CLASSIC VERSATILE' PADLOCK

- Suitable for most applications
- Solid 45mm brass body
- 8mm Ø Boron Alloy - Quick Change Shackle
- 6 pin C4 key way (in keyed models)
- Suits Restricted key systems

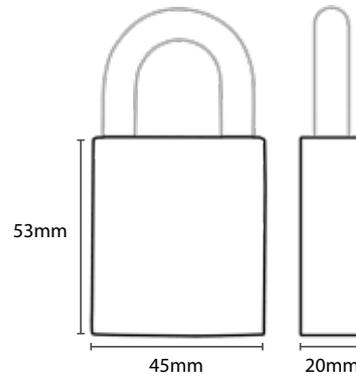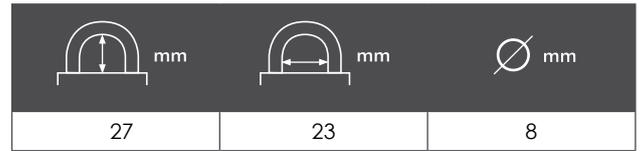

ORDERING INFORMATION

cat.-no.	Configuration
500/45-KD	Keyed to Differ
500/45-KA	Keyed Alike
500/45-ALB	All Less Barrel
500/45-27.SS-ALB	All Less Barrel - SS shackle
500/45-ALC	All Less Cylinder
500/45-LBS	Less Barrel & Shackle





LOCKTON

500/50

'INCREASED PROTECTION' PADLOCK

- Extra security
- Solid 50mm brass body
- Nickel plated finish
- 9mm Ø Boron Alloy - Quick Change Shackle
- 6 pin C4 key way (in keyed models)
- Suits Restricted key systems

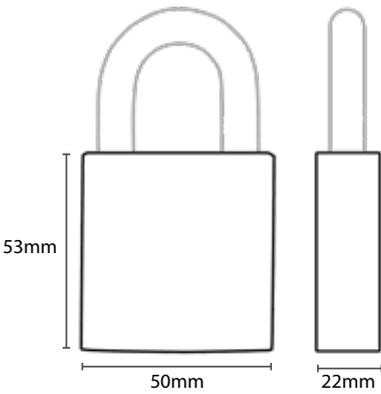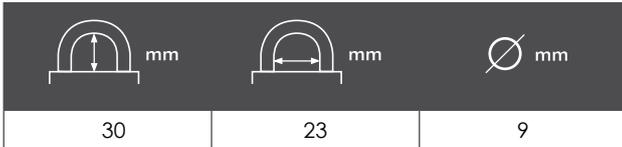



ORDERING INFORMATION

cat.-no.	Configuration
500/50-KD	Keyed to Differ
500/50-KA	Keyed Alike
500/50-ALB	All Less Barrel
500/50-ALC	All Less Cylinder
500/50-LBS	Less Barrel & Shackle

500/55

'HIGH SECURITY' PADLOCK

- Massive 55mm heavy duty body
- Chrome plated finish
- 10mm Ø Boron Alloy - Quick Change Shackle 6 pin C4 key way (in keyed models)
- Suits Restricted key systems

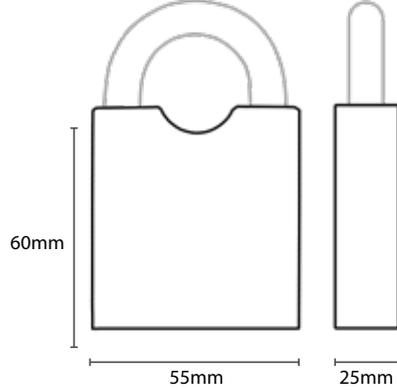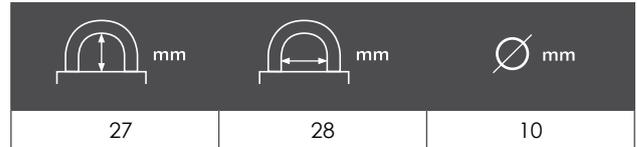

ORDERING INFORMATION

cat.-no.	Configuration
500/55-KD	Keyed to Differ
500/55-KA	Keyed Alike
500/55-ALB	Less Barrel
500/55-LBS	Less Barrel & Shackle

Padlock Spares & Accesories

500/40

SPARE SHACKLES

- To fit 40mm padlock
- Stainless Steel /Marine Alloy



ORDERING INFORMATION

cat.-no.	(mm)	(mm)	(mm)
500/40.27-SS	27 (Std.)	20	6.35
500/40.50-SS	50	20	6.35
500/40.75-SS	75	20	6.35

500/45

SPARE SHACKLES

- To fit 45mm padlock
- Available in Boron Alloy or Stainless Steel /Marine Alloy



ORDERING INFORMATION

cat.-no.	(mm)	(mm)	(mm)
BORON ALLOY			
500/45.27	27 (Std.)	23	8
500/45.50	50	23	8
500/45.75	75	23	8
500/45.90	90	23	8
STAINLESS STEEL - MARINE ALLOY			
500/45.27-SS	27	23	8
500/45.50-SS	50	23	8
500/45.75-SS	75	23	8
500/45.90-SS	90	23	8

500/50

SPARE SHACKLES

- To fit 50mm padlock
- Available in Boron Alloy or Stainless Steel /Marine Alloy




ORDERING INFORMATION

cat.-no.	(mm)	(mm)	(mm)
BORON ALLOY			
500/50.30	30 (Std.)	23	9
500/50.50	50	23	9
500/50.75	75	23	9
500/50.90	90	23	9
STAINLESS STEEL - MARINE ALLOY			
500/50.30-SS	30	23	9
500/50.50-SS	50	23	9
500/50.75-SS	75	23	9
500/50.90-SS	90	23	9

500/55

SPARE SHACKLES

- To fit 55mm padlock
- Available in Boron Alloy or Stainless Steel /Marine Alloy

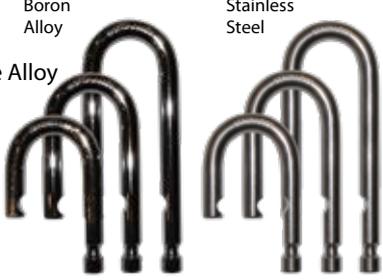

ORDERING INFORMATION

cat.-no.	(mm)	(mm)	(mm)
BORON ALLOY			
500/55.27	27 (Std.)	23	10
500/55.50	50	23	10
500/55.75	75	23	10
STAINLESS STEEL - MARINE ALLOY			
500/55.27-SS	27	23	10
500/55.50-SS	50	23	10
500/55.75-SS	75	23	10



LOCKTON

Padlock Spares & Accesories

500.SCT

SHACKLE CHANGE TOOL

- For use with LOCKTON padlocks



ORDERING INFORMATION

cat.-no.	QTY
500.SCT	1

LOCKTON DISPLAY

LOCKTON PADLOCKS - DISPLAY MERCHANDISER



ORDERING INFORMATION

cat.-no.	Material	Dimensions (W x H mm)
WALL-4	Perspex	400 x 280

500 SPARES

SPARES TO SUIT LOCKTON 500 SERIES PADLOCKS



ORDERING INFORMATION

cat.-no.	DESCRIPTION	PACK SIZE
500.BRL	Spare '500 Series' BARREL - Brass finish	1
500.BRL-NP	Spare '500 Series' BARREL - Nickel finish	1
500.BRL-CP	Spare '500 Series' BARREL - Chrome plated	1
500/40.CYL	Spare '500 Series' CYLINDER - suits 40mm padlock (LESS barrel)	1
500/45.CYL	Spare '500 Series' CYLINDER - suits 45mm padlock (LESS barrel)	1
500/50.CYL	Spare '500 Series' CYLINDER - suits 50mm padlock (LESS barrel)	1
500/55.CYL	Spare '500 Series' CYLINDER - suits 55mm padlock (LESS barrel)	1
500/40.05	'500 Series' SERVICE KIT - Suits 500/40	1
500/45.05	'500 Series' SERVICE KIT - Suits. 500/45	1
500/50.05	'500 Series' SERVICE KIT - Suits. 500/50	1
500/55.05	'500 Series' SERVICE KIT - Suits 500/55	1

Lock Cylinders



LOCKTON Cylinders are manufactured with the state-of-the-art equipment using only high quality materials to guarantee superior quality & security.

- Internals are precision made to ensure accuracy & ease of use.
- Made to suit the Australian market & are compatible with in-line restricted key systems.
- **Oval Cylinders**
- **Round Cylinders**
- **530 Cylinders**
- **PD Cylinders**
- **Trilock Cylinders**
- **Euro Cylinders - Double, Single, Double Lazy & Half**



410

570 OVAL CYLINDERS

- Solid brass body
- Suitable for restricted systems
- Satin chrome finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
410-SC-KD	Oval Cylinder - Keyed to Differ	6
410-SC-ALB	Oval Cylinder - All Less Barrel	6
410-SC-KA	Oval Cylinder - Keyed Alike	6

410 - BLACK

BLACK 570 OVAL CYLINDERS

- Solid brass body
- Black coating
- Suitable for restricted systems
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
410-BK-KD	Oval Cylinder - Keyed to Differ	6

420

201 ROUND CYLINDERS

- Solid brass body
- Large solid brass rose
- Suitable for restricted systems
- Satin chrome finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
420-SC-KD	Round Cylinder - Keyed to Differ	6
420-SC-ALB	Round Cylinder - All Less Barrel	6
420-SC-KA	Round Cylinder - Keyed Alike	6

420 - BLACK

BLACK 201 ROUND CYLINDERS

- Solid brass body
- Black coating
- Large solid brass rose
- Suitable for restricted systems
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
420-BK-KD	Round Cylinder - Keyed to Differ	6

Lock Cylinders

430

530 CYLINDERS

- Solid brass body
- Suitable for restricted systems
- Satin chrome face, brass body
- C4 keyway
- 6 Pin




ORDERING INFORMATION

cat.-no.	Description	Pins
430-SC-ALB	530 Cylinder - All Less Barrel	6
430-SC-KA	530 Cylinder - Keyed Alike	6

440-1

PD CYLINDERS - 6 PIN

- Solid brass body
- Suitable for restricted systems
- Satin chrome face, brass body
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
440-1-SC-ALB	PD Cylinder - All Less Barrel	6
440-1-SC-KA	PD Cylinder - Keyed Alike (C4)	6

440-2

PD CYLINDER - TE2 - 5 PIN

- Solid brass body
- Suitable for Gainsborough key way
- Chrome plated face, brass body
- TE2 keyway
- 5 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
440-2-CP-KA	PD Cylinder - Keyed Alike (TE2)	5

490

TRILOCK CYLINDERS

- Solid brass body
- Suitable for restricted systems
- Easy re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
490-TRI-CP-KD	Trilock Cylinder - Keyed to Differ	6
490-TRI-CP-KA	Trilock Cylinder - Keyed Alike	6

496-1-CP

DOUBLE EURO CYLINDER - FIXED

- Suitable for restricted systems
- Quick re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
496-1-CP-KD	Double Euro Fixed - Keyed to Differ	6
496-1-CP-ALB	Double Euro Fixed - All Less Barrel	6
496-1-CP-KA	Double Euro Fixed - Keyed Alike	6



496-2-CP

SINGLE EURO CYLINDER - FIXED CAM

- Suitable for restricted systems
- Quick re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
496-2-CP-KD	Single Euro Fixed - Keyed to Differ	6
496-2-CP-ALB	Single Euro Fixed - All Less Barrel	6
496-2-CP-KA	Single Euro Fixed - Keyed Alike	6

495-3-CP

5 PIN DOUBLE EURO LAZY CAM

- Suitable for screen door locks
- Quick re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 5 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
495-3-CP-KD	Double euro lazy - Keyed to Differ	5
495-3-CP-KA1	Double euro lazy - Keyed Alike	5
495-3-CP-KA2	Double euro lazy - Keyed Alike	5

496-3-CP

DOUBLE EURO CYLINDER - LAZY CAM

- Suitable for screen door locks
- Suitable for restricted systems
- Quick re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
496-3-CP-ALB	Double Euro Lazy - All Less Barrel	6
496-3-CP-KA	Double Euro Lazy - Keyed Alike	6

495-1-CP

5 PIN DOUBLE EURO FIXED CAM

- Suitable for screen door locks
- Quick re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 5 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
495-1-CP-KD	5 Pin Double Euro Fixed Cam	5
495-1-CP-KA	5 Pin Double Euro Fixed Cam	5

496-5-CP

HALF EURO CYLINDER - FIXED CAM

- Suitable for restricted systems
- Easy re-keyable cylinder
- Chrome plated finish
- C4 keyway
- 6 Pin



ORDERING INFORMATION

cat.-no.	Description	Pins
496-5-SC-KA	Half Euro Fixed - Keyed Alike	6

495-3-CP-KA-R

10 PACK - 5 PIN DOUBLE EURO LAZY CAM

- Suitable for screen door locks
- Quick re-keyable cylinder
- Chrome plated finish
- C4 keyway
- Random Keyed Alike groups
- 5 Pin

**x10
KA-R**



ORDERING INFORMATION

cat.-no.	Description	Pins
495-3-CP-KA-R	Double Euro Lazy - Random Keyed Alike	5



Door Closers



LOCKTON Rack & Pinion Door Closers are suitable for both architectural & commercial applications.

Parallel arm brackets are included in all closers. Optional hold open arms and slidetrack arms are also available.

LOCKTON Door Closers are certified & fire-rated.

LOCKTON CAM Action Door Closers allow door opening with minimum of force. Higher efficiency opening action, compared to a traditional rack-and-pinion door closer.

This easy opening feature means the CAM Action range meet the standards required in the Disability Discrimination Act (DDA), and as such are suitable for a wider range of applications requiring disabled access.



LOCKTON

SGDC100 (RACK & PINION)

SGDC100 – EN SIZE 2/3/4 SELECTABLE DOOR CLOSER

PRODUCT SPECIFICATIONS


- SGDC100 is a trim and economical, door closer suitable for commercial applications
- Non-handed unit
- Reversible without any adjustment
- Available with standard arms
- Optional hold-open arms
- Closing speed range: 180°–15°
- Latching speed range: 15°–0°
- Adjustable for door sizes 2/3/4 by Shoe / Template adjustment
- Suitable for Door size 2/3/4
 - Size #2: Door width of 850mm & Weight of 40kg
 - Size #3: Door width of 950mm & Weight of 60kg
 - Size #4: Door width of 1100mm & Weight of 80kg
- Cast aluminum body
- Steel arms
- High strength heat treated piston
- Silver finish

STANDARD CONFIGURATION

- Closer unit
- Standard Arm Assembly
- Parallel Arm Bracket
- Mounting Hardware
- Installation Instructions

CERTIFICATIONS & WARRANTY

- Tested & certified to BS EN 1154:1997
- 5 year warranty*

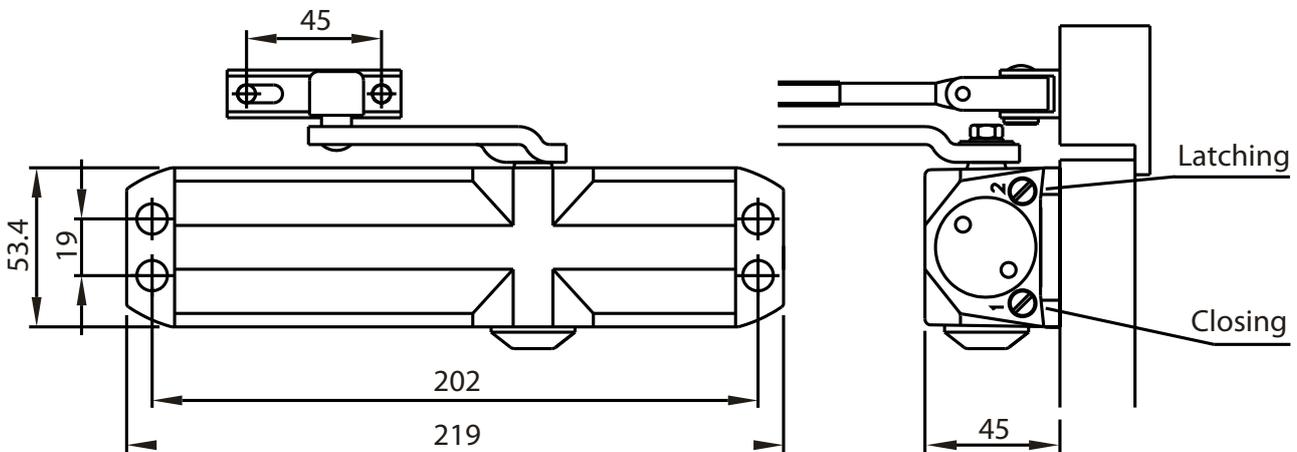

ORDERING INFORMATION

cat.-no.	Description
SGDC100-S	Standard Arm Door Closer

Door Closers

SGDC150 (RACK & PINION)

SGDC150 – EN SIZE 2/3/4 SELECTABLE DOOR CLOSER

PRODUCT SPECIFICATIONS


- SGDC150 is a trim and economical, door closer suitable for architectural & commercial applications
- Constructed with extruded anodized aluminum body, steel arm protected against rust & high quality steel internal components
- Heat treated steel rack & pinion immersed in high grade oil to operate a nest of coils to give a smooth precise action & minimum wear
- Piston & spindle have been heat treated for high strength
- Uses needle bearings to reach optimum performance and efficiency
- Extra tensile strength alloy steel springs
- A built-in pressure relief valve protects the closer against abuse
- Stable hydraulic fluid - low sensitivity to temperature change
- Non-handed unit
- Reversible without any adjustment
- Available with standard arms or hold-open arms
- Adjustable Closing & Latching Speed - Thermoconstant Valve
- Closing speed range: 180°–15°
- Latching speed range: 15°–0°
- Adjustable for door sizes 2/3/4 by Shoe / Template adjustment
- Suitable for Door size 2/3/4
 - Size #2: Door width of 850mm & Weight of 40kg
 - Size #3: Door width of 950mm & Weight of 60kg
 - Size #4: Door width of 1100mm & Weight of 80kg
- Silver finish

STANDARD CONFIGURATION

- Closer unit
- Standard Arm Assembly
- Parallel Arm Bracket
- Mounting Hardware
- Installation Instructions

CERTIFICATIONS & WARRANTY

- Tested & certified to BS EN 1154:1997
- 5 year warranty*

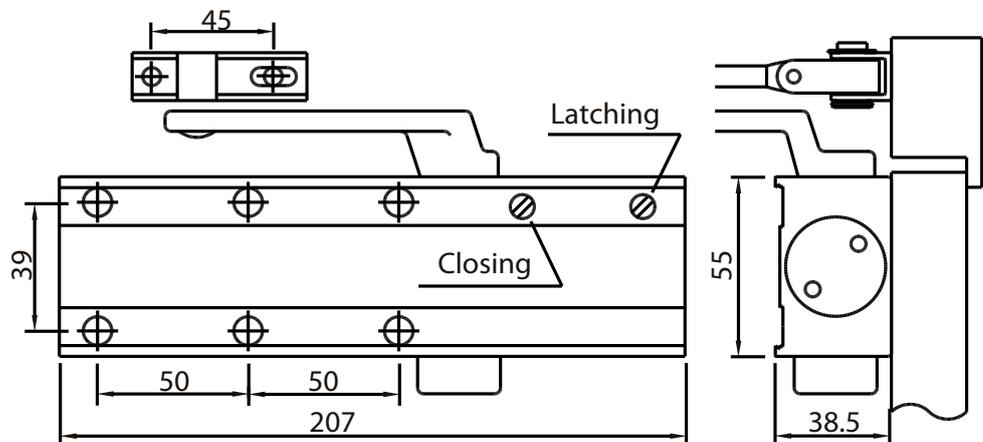

ORDERING INFORMATION

cat.-no.	Description
SGDC150-S	Standard Arm Door Closer



LOCKTON

SGDC160 (RACK & PINION)

SGDC160 – EN SIZE 2-4 ADJUSTABLE DOOR CLOSER – WITH BACKCHECK

PRODUCT SPECIFICATIONS

- SGDC160 is a trim and economical, fire certified door closer suitable for architectural & commercial applications
- Constructed with extruded anodized aluminum body, steel arm protected against rust & high quality steel internal components
- Heat treated steel rack & pinion immersed in high grade oil to operate a nest of coils to give a smooth precise action & minimum wear
- Backcheck function
- Piston & spindle have been heat treated for high strength
- Uses needle bearings to reach optimum performance and efficiency
- Extra tensile strength alloy steel springs
- A built-in pressure relief valve protects the closer against abuse
- Stable hydraulic fluid - low sensitivity to temperature change
- Non-handed unit
- Reversible without any adjustment
- Available with standard arms
- Optional hold-open arms
- Adjustable Closing & Latching Speed - Thermoconstant Valve
- Closing speed range: 180°-15°
- Latching speed range: 15°-0°
- Adjustable for door sizes 2/3/4
- Suitable for Door size 2 - 4
 - Size #2: Door width of 850mm & Weight of 40kg
 - Size #3: Door width of 950mm & Weight of 60kg
 - Size #4: Door width of 1100mm & Weight of 80kg
- Silver finish




STANDARD CONFIGURATION

- Closer unit
- Standard Arm Assembly
- Parallel Arm Bracket
- Mounting Hardware
- Installation Instructions

CERTIFICATIONS & WARRANTY

- Tested & certified to BS EN 1154:1997
- Fire rated. AS1905, AS1530
- 5 year warranty*

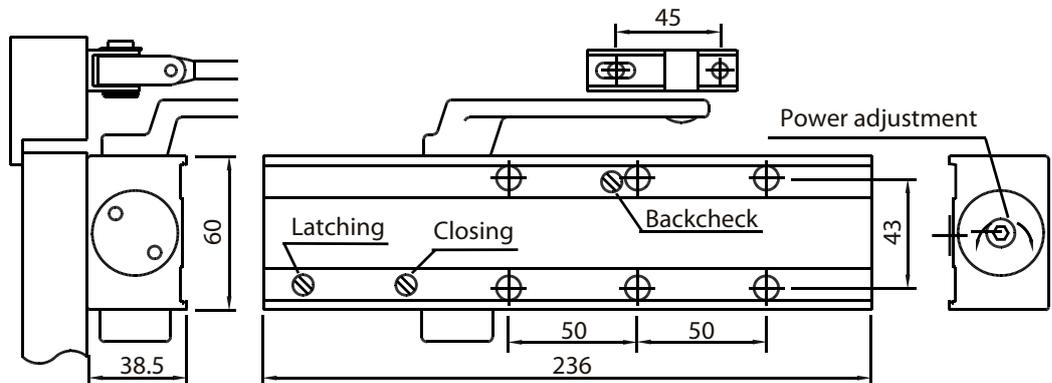

ORDERING INFORMATION

cat.-no.	Description
SGDC160-S	Standard Arm Door Closer

Door Closers

SGDC165 (RACK & PINION)

SGDC165 – EN SIZE 2–6 ADJUSTABLE DOOR CLOSER – WITH BACKCHECK

PRODUCT SPECIFICATIONS

- SGDC165 is a trim and economical, fire certified door closer suitable for architectural & commercial applications
- Constructed with extruded anodized aluminum body, steel arm protected against rust & high quality steel internal components
- Heat treated steel rack & pinion immersed in high grade oil to operate a nest of coils to give a smooth precise action & minimum wear
- Backcheck function
- Piston & spindle has been heat treated for high strength
- Using needle bearings to reach optimum performance and efficiency
- Extra tensile strength alloy steel springs
- A built-in pressure relief valve protects the closer against abuse
- Stable hydraulic fluid - low sensitivity to temperature change
- Non-handed unit
- Delayed action function between 180° to 65°
- Reversible without any adjustment
- Available with standard arms
- Optional hold-open arms
- Adjustable Closing & Latching Speed - Thermoconstant Valve
- Closing speed range: 180°–15°
- Latching speed range: 15°–0°
- Adjustable for door sizes 2/3/4/5/6
- Suitable for Door size 2 - 6
 - Size #2: Door width of 850mm & Weight of 40kg
 - Size #3: Door width of 950mm & Weight of 60kg
 - Size #4: Door width of 1100mm & Weight of 80kg
 - Size #5: Door width of 1250mm & Weight of 100kg
 - Size #6: Door width of 1400mm & Weight of 120kg
- Silver finish




STANDARD CONFIGURATION

- Closer unit
- Standard Arm Assembly
- Parallel Arm Bracket
- Mounting Hardware
- Installation Instructions

CERTIFICATIONS & WARRANTY

- Tested & certified to BS EN 1154:1997
- Fire rated. AS1905, AS1530
- 5 year warranty*

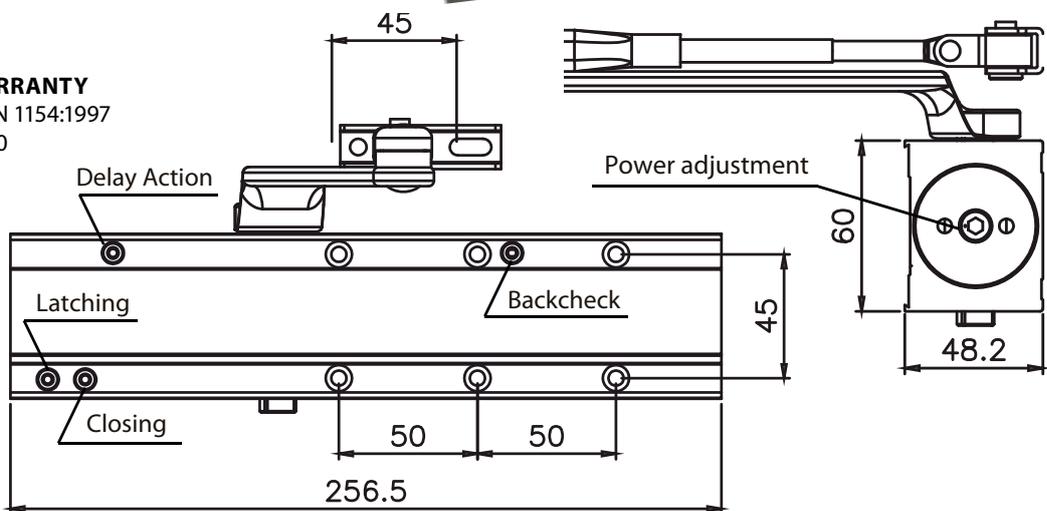

ORDERING INFORMATION

cat.-no.	Description
SGDC165-S	Standard Arm Door Closer



LOCKTON

SGDC190 (CAM ACTION)

SGDC190 – EN SIZE 2-4 ADJUSTABLE CAM ACTION DOOR CLOSER – WITH BACKCHECK

PRODUCT SPECIFICATIONS

- Opening angle: Up to 180°
- SGDC190 Surface mounted Cam action door closer, fire certified suitable for architectural & commercial applications
- Constructed with extruded anodized aluminium body, passively treated steel arm & high quality steel internal components
- Compact design with minimum projection allowing installation to door having an adjacent wall at 90°
- Cam system operates with high quality spring to provide a smooth precise action & minimum wear
- Spindle has been heat treated for high strength
- A built-in pressure relief valve protects the closer against abuse
- Stable hydraulic fluid low sensitivity to temperature change
- Backcheck function
- B type Pull side door fixing & Push side transom fixing
- G type Push side door fixing & Pull side transom fixing
- Optional hold open insert
- Supplied with track arm
- Adjustable Closing & Latching Speed - Thermoconstant Valve
- Closing speed range: 180°-15°
- Latching speed range: 15°-0°
- Full Adjustable for Door Sizes 2 through to 4
 - Size #2: Door width of 850mm & Weight of 40kg
 - Size #3: Door width of 950mm & Weight of 60kg
 - Size #4: Door width of 1100mm & Weight of 80kg
- Silver finish




STANDARD CONFIGURATION

- Closer unit
- Track Arm Assembly
- Mounting Hardware
- Installation Instructions



CERTIFICATIONS & WARRANTY

- Tested & certified to BS EN 1154:1997
- Fire rated. AS1905, AS1530
- 5 year warranty*

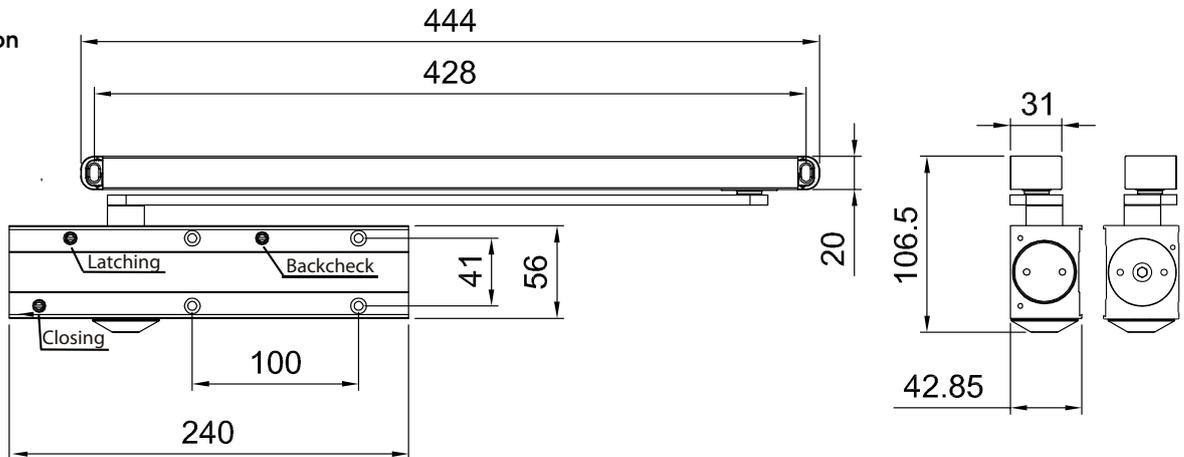

ORDERING INFORMATION

cat.-no.	Description
SGDC190-S-B	Track arm Cam action door closer. B Type (Pull)
SGDC190-S-G	Track arm Cam action door closer. G Type (Push)

Door Closers

SGDC195 (CAM ACTION)

SGDC195 – EN SIZE 2-5 ADJUSTABLE CAM ACTION DOOR CLOSER – WITH BACKCHECK

PRODUCT SPECIFICATIONS

- Opening angle: Up to 180°
- SGDC195 Surface mounted Cam action door closer, fire certified suitable for architectural & commercial applications
- Constructed with extruded anodized aluminium body, passively treated steel arm & high quality steel internal components
- Compact design with minimum projection allowing installation to door having an adjacent wall at 90°
- Cam system operates with high quality spring to provide a smooth precise action & minimum wear
- Spindle has been heat treated for high strength
- Delayed Action Valve
- Extra tensile strength alloy steel springs
- A built-in pressure relief valve protects the closer against abuse
- Stable hydraulic fluid low sensitivity to temperature change
- Backcheck function
- Optional hold open insert
- Supplied with track arm
- Adjustable Closing & Latching Speed - Thermoconstant Valve
- Adjustable Delay 180°-120°
- Closing speed range: 70°-10°
- Latching speed range: 10°-0°
- Full Adjustable for Door Sizes 2 through to 5
 - Size #2: Door width of 850mm & Weight of 40kg
 - Size #3: Door width of 950mm & Weight of 60kg
 - Size #4: Door width of 1100mm & Weight of 80kg
 - Size #5: Door width of 1250mm & Weight of 100kg
- Silver finish




STANDARD CONFIGURATION

- Closer unit
- Track Arm Assembly
- Mounting Hardware
- Installation Instructions



CERTIFICATIONS & WARRANTY

- Tested & certified to BS EN 1154:1997
- Fire rated. AS1905, AS1530
- 5 year warranty*

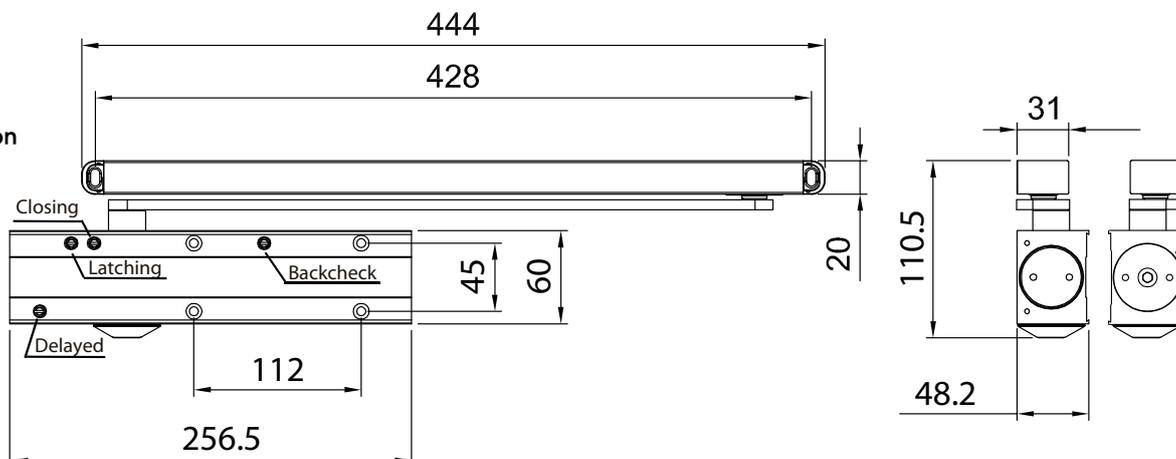

ORDERING INFORMATION

cat.-no.	Description
SGDC195-S-B	Track arm Cam action door closer. B Type (Pull)
SGDC195-S-G	Track arm Cam action door closer. G Type (Push)




Door Closer Spare & Accesories

TO SUIT RACK & PINION CLOSERS

SGDCA060 (RACK & PINION)

DROP PLATE

- Suits 160/165 series door closers

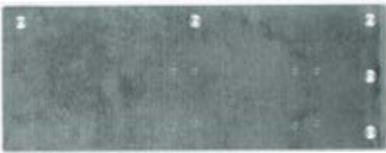

cat.-no.

SGDCA060

SGDC160-MP (RACK & PINION)

MOUNTING PLATE

- Suits 160 series door closers



cat.-no.

SGDC160-MP

SGDC165-MPW (RACK & PINION)

MOUNTING PLATE

- Suits 165 series door closers



cat.-no.

SGDC165-MP

SGDCHOAR (RACK & PINION)

HOLD OPEN ARM

- Suits 100 series door closers



cat.-no.

SGDCHOAR

SGDCHOAR-2 (RACK & PINION)

HOLD OPEN ARM

- Suits 160 series door closers



cat.-no.

SGDCHOAR-2

SGDCHOAR-3 (RACK & PINION)

HOLD OPEN ARM

- Suits 165 series door closers



cat.-no.

SGDCHOAR-3

SGDCA078 (RACK & PINION)

SLIDING TRACK ARM (SLIDE RAIL)

- Suits 160 series door closers



cat.-no.

SGDCA078

SGDCA079 (RACK & PINION)

SLIDING TRACK ARM (SLIDE RAIL)

- Suits 165 series door closers



cat.-no.

SGDCA079

SGDCA112 (RACK & PINION)

PARALLEL ARM PACKER

- Suits 100/150/160/165 series door closers



cat.-no.

SGDCA112

Spare & Accesories

SGDCA01 (RACK & PINION)

PARALLEL ARM BRACKET

- Suits 100/150/160/165 series door closers



cat.-no.

SGDCA01

SGDCA112 (RACK & PINION)

PARALLEL ARM PACKER

- Suits 100/150/160/165 series door closers



cat.-no.

SGDCA112

TO SUIT CAM ACTION CLOSERS

SGDC190/195-S-CUS (CAM ACTION)

SLIDE ARM CUSHION

- Suits 190/195 series door closers



cat.-no.

SGDC190/195-S-CUS

SGDC190/195-S-HOU (CAM ACTION)

HOLD OPEN INSERT

- Suits 190/195 series door closers



cat.-no.

SGDC190/195-S-HOU

SGDCA090

DROP PLATE

- Suits 190 series door closers



cat.-no.

SGDCA090

SGDCA095

MOUNTING PLATE

- Suits 195 series door closers



cat.-no.

SGDCA095



LOCKTON

Panic Bars




LOCKTON Panic Bars are built to last, with class-leading quality & robust construction.

- Suitable for commercial applications, including wood, steel, or aluminum doors.
- Available in rim & vertical types to suit a wide variety of applications & configurations.
- **304B Stainless Steel Construction**
- **High shock-resistant latching mechanism for protection against vandalism**
- **All internal components are of high rust resistant alloy or electroplated steel to avoid corrosion**



Panic Bars

COMMON CONFIGURATIONS

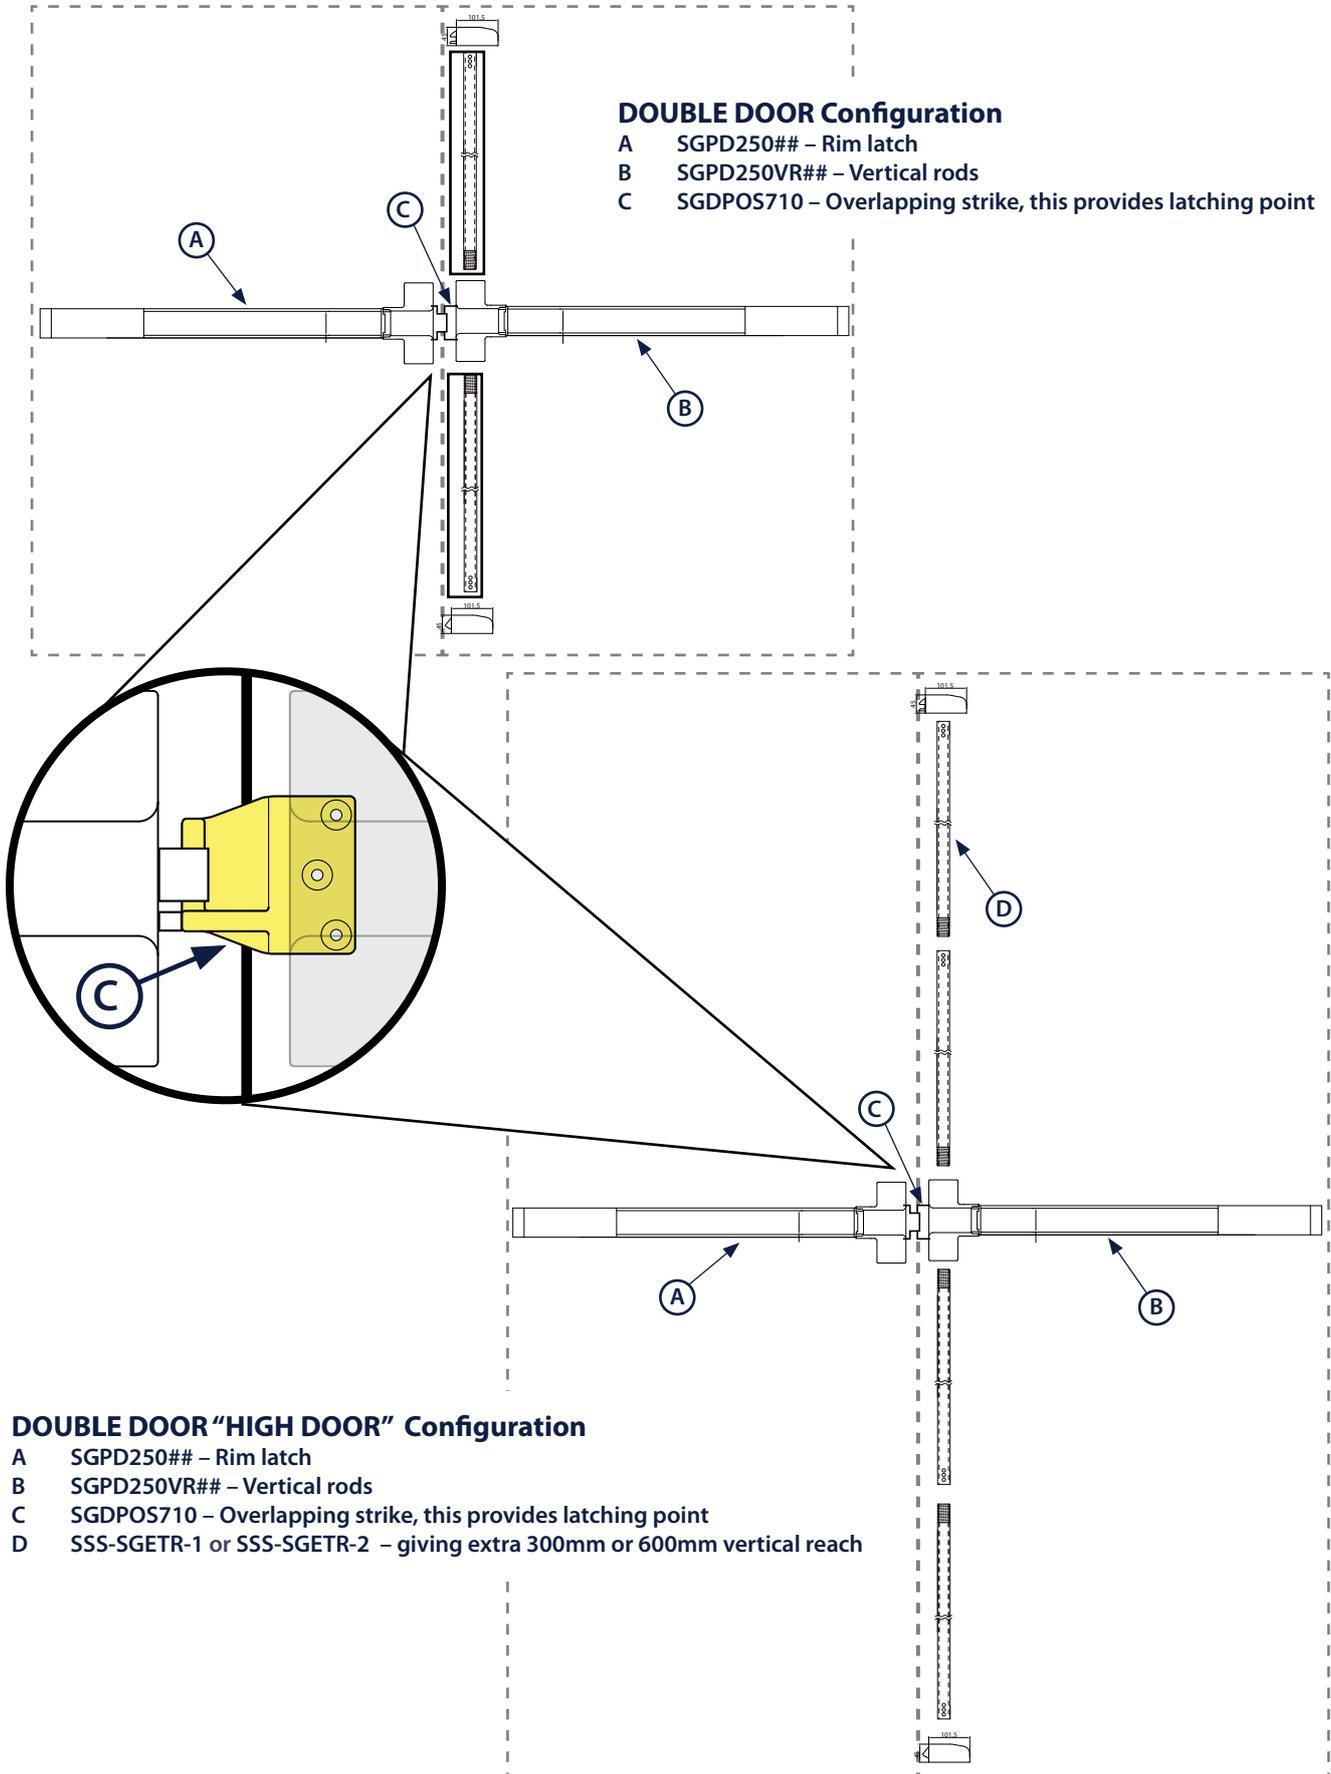



SGPD250

250 GLOBAL SERIES – CERTIFIED PANIC EXIT DEVICE – RIM TYPE

PRODUCT SPECIFICATIONS

- Rim type
- 304B Stainless Steel Construction
- High shock-resistant latching mechanism for protection against vandalism
- All internal components are of high rust resistant alloy or heavily electroplated steel to avoid corrosion
- All devices are non-handed
- External access trims are available with different functions
- Auxiliary guarded latch and deadlocks latch bolt automatically when door is closed
- All trims feature a through-bolted design to the device that enables a secure and durable installation
- Standard dimension: Width 900mm & Height 155mm
- Satin Stainless Steel

STANDARD CONFIGURATION


- Exit device unit
- Mounting components
- Instruction sheet
- Template

CERTIFICATIONS & WARRANTY

- Complies with BS EN1125
- 5 year warranty*



SGPD250
Rim Exit Device, Stainless Steel Push-bar type

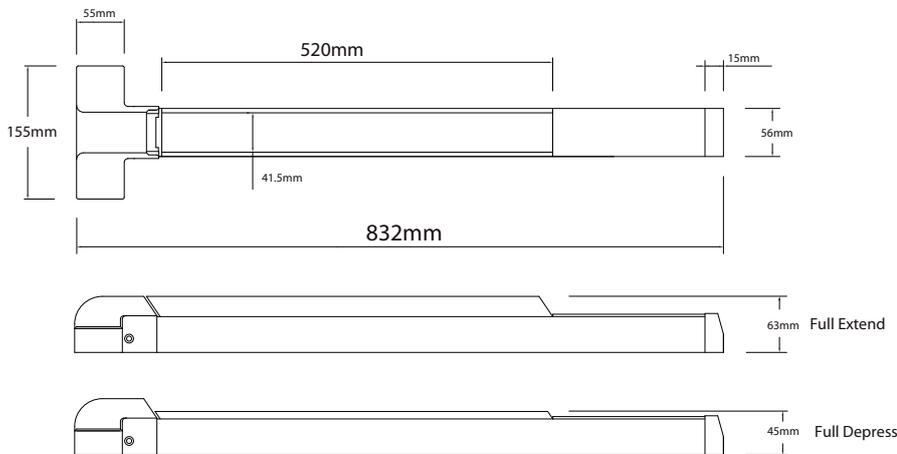

ORDERING INFORMATION

cat.-no.	Description
SGPD250-F-SS	Panic Exit Device - Fire-Rated - 1 Point Locking
SGPD250-SS	Panic Exit Device - Dogging - 1 Point Locking

Panic Bars

SGPD250VR

250 GLOBAL SERIES – CERTIFIED PANIC EXIT DEVICE – VERTICAL ROD TYPE

PRODUCT SPECIFICATIONS


- Surface Vertical type
- 304B Stainless Steel Construction
- High shock-resistant latching mechanism for protection against vandalism
- All internal components are of high rust resistant alloy or heavily electroplated steel to avoid corrosion
- All devices are non-handed
- External access trims are available with different functions
- Auxiliary guarded latch and deadlocks latch bolt automatically when door is closed
- All trims feature a through-bolted design to the device that enables a secure and durable installation
- Standard dimension: Width 900mm & Height (for Vertical Rod) 2438mm
- Satin Stainless Steel

STANDARD CONFIGURATION


- Exit device unit
- Mounting components
- Instruction sheet
- Template

CERTIFICATIONS & WARRANTY

- Complies with BS EN1125
- 5 year warranty*

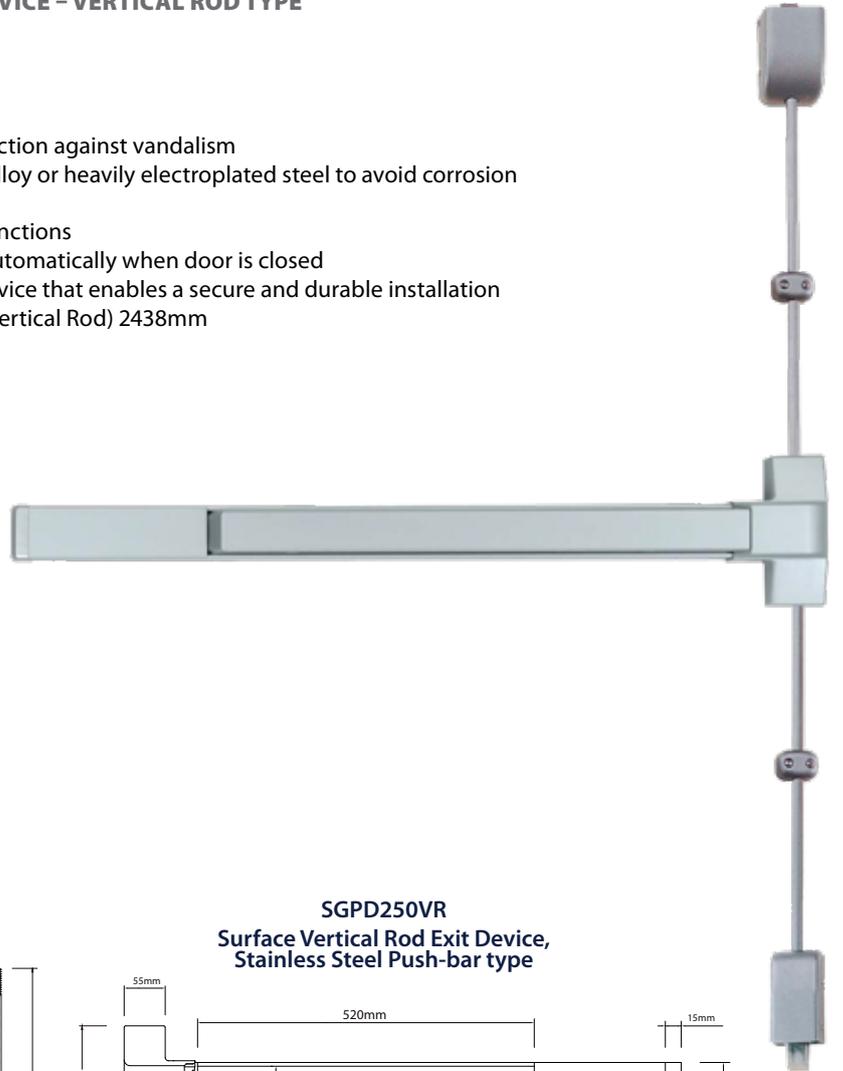

SGPD250VR
Surface Vertical Rod Exit Device,
Stainless Steel Push-bar type

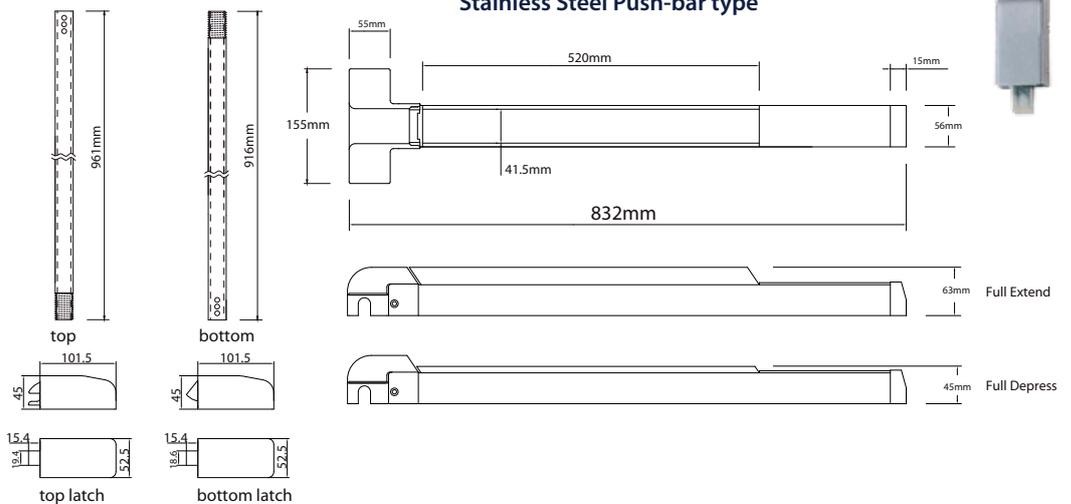

ORDERING INFORMATION

cat.-no.	Description
SGPD250VR-F-SS	Panic Exit Device - Fire-Rated - 2 Point Locking
SGPD250VR-SS	Panic Exit Device - Dogging - 2 Point Locking



LOCKTON

SGPD250-WD

250 GLOBAL SERIES – CERTIFIED PANIC EXIT DEVICE – RIM TYPE (WIDE DOOR)

PRODUCT SPECIFICATIONS

- Rim type
- 304B Stainless Steel Construction
- High shock-resistant latching mechanism for protection against vandalism
- All internal components are of high rust resistant alloy or heavily electroplated steel to avoid corrosion
- All devices are non-handed
- External access trims are available with different functions
- Auxiliary guarded latch and deadlocks latch bolt automatically when door is closed
- All trims feature a through-bolted design to the device that enables a secure and durable installation
- Standard dimension: Width 1200mm & Height 155mm
- Satin Stainless Steel

STANDARD CONFIGURATION


- Exit device unit
- Mounting components
- Instruction sheet
- Template

CERTIFICATIONS & WARRANTY

- Complies with BS EN1125
- 5 year warranty*



WIDE DOOR

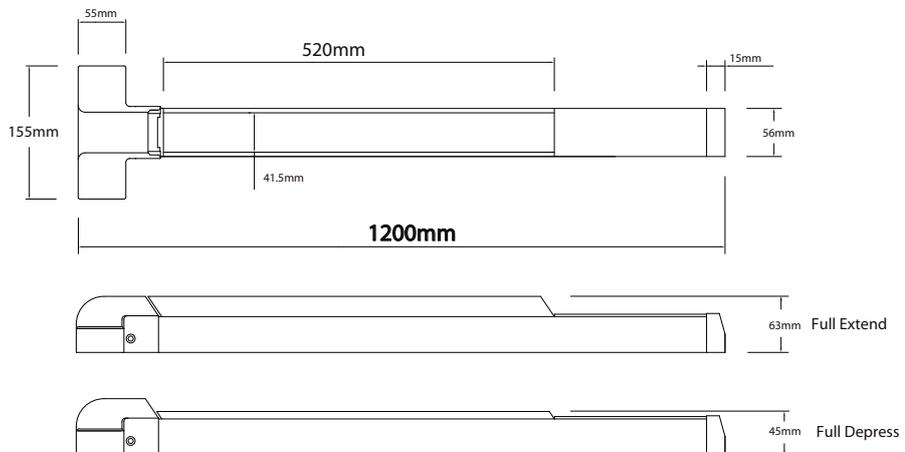

ORDERING INFORMATION

cat.-no.	Description
SGPD250-F-SS-WD-1	WIDE Panic Exit Device - Fire-Rated - 1-Point Locking
SGPD250-SS-WD-1	WIDE Panic Exit Device - Dogging - 1-Point Locking

Panic Bars

SGPD250VR-WD

250 GLOBAL SERIES – CERTIFIED PANIC EXIT DEVICE – VERTICAL ROD TYPE (WIDE DOOR)

PRODUCT SPECIFICATIONS

- Surface Vertical type
- 304B Stainless Steel Construction
- High shock-resistant latching mechanism for protection against vandalism
- All internal components are of high rust resistant alloy or heavily electroplated steel to avoid corrosion
- All devices are non-handed
- External access trims are available with different functions
- Auxiliary guarded latch and deadlocks latch bolt automatically when door is closed
- All trims feature a through-bolted design to the device that enables a secure and durable installation
- Standard dimension: Width 1200mm & Height (for Vertical Rod) 2438mm
- Satin Stainless Steel

STANDARD CONFIGURATION

- Exit device unit
- Mounting components
- Instruction sheet
- Template

CERTIFICATIONS & WARRANTY



- Complies with BS EN1125
- 5 year warranty*



warrington
certification



WIDE DOOR

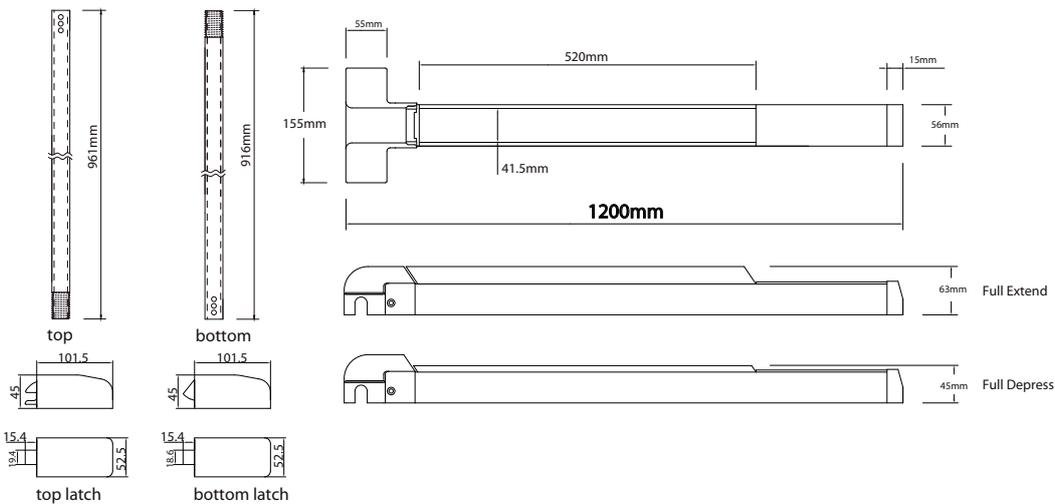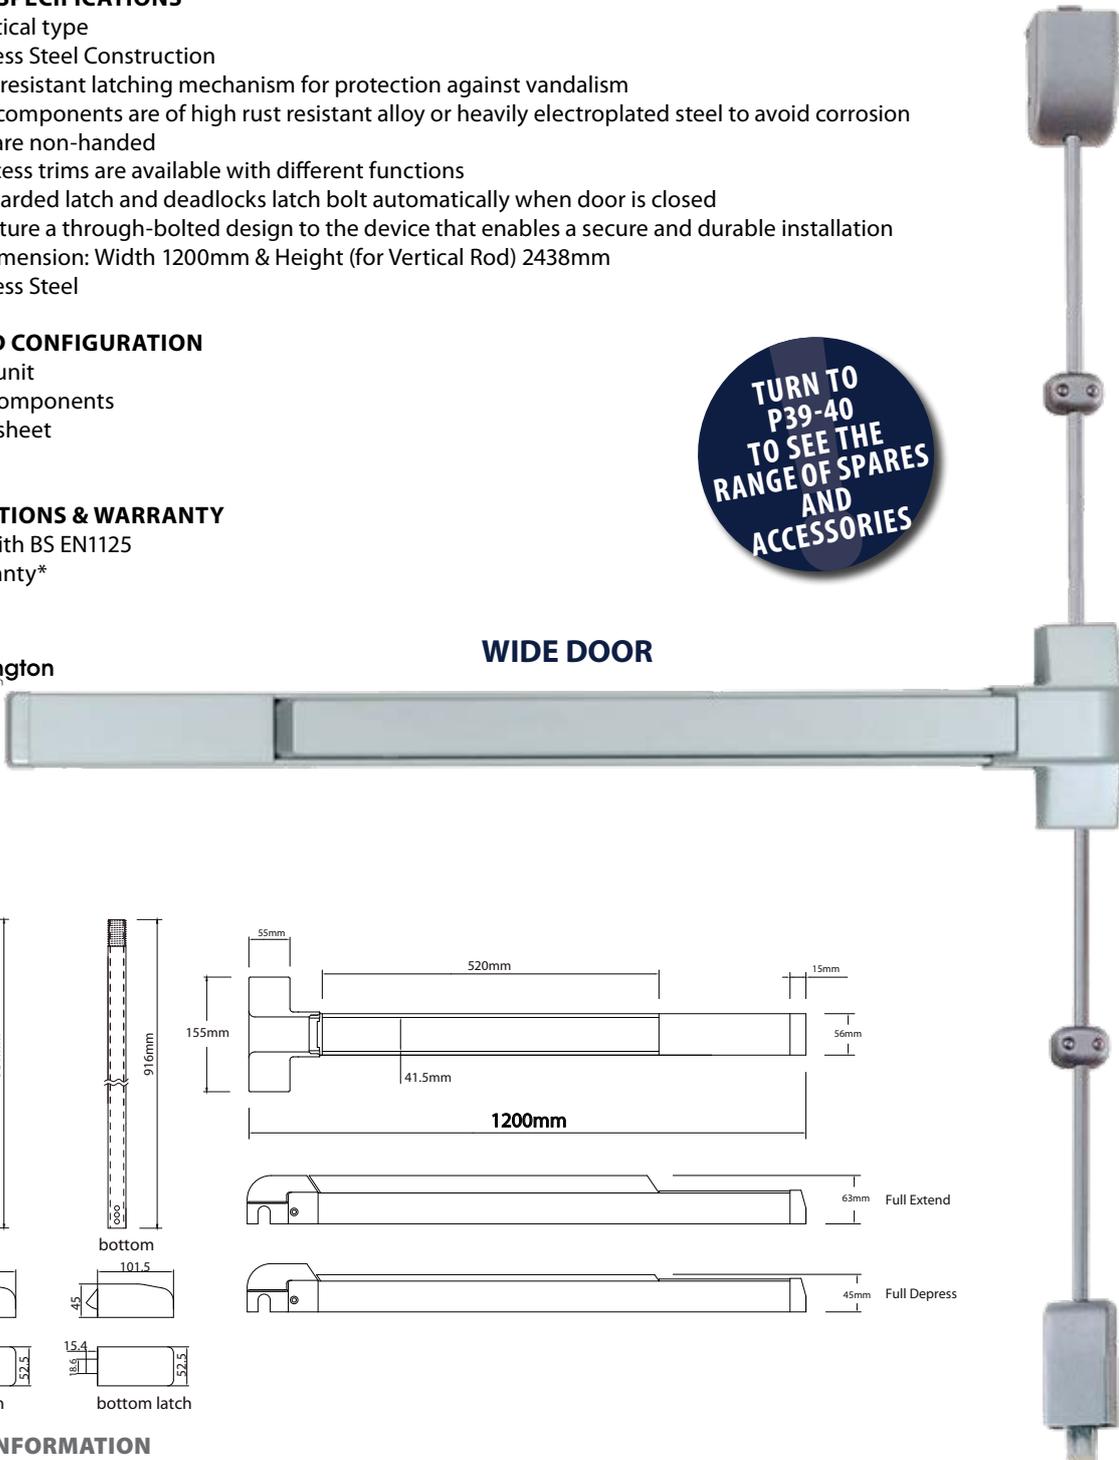

ORDERING INFORMATION

cat.-no.	Description
SGPD250-F-VR-SS-WD-1	WIDE Panic Exit Device - Fire-Rated - 2-Point Locking
SGPD250-VR-SS-WD-1	WIDE Panic Exit Device - Dogging - 2-Point Locking



LOCKTON


Panic Bar Spare & Accessories

SGPDXELSS-EU-E

EXTERNAL TRIM LEVER WITH ESCUTCHEON

• Entrance

Takes Half Euro cylinder (Not supplied)

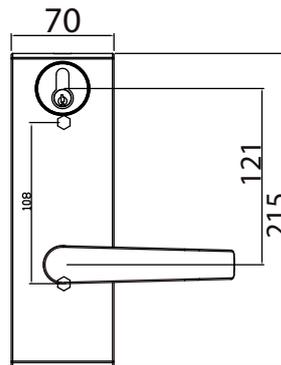


cat.-no.	Description	PACK SIZE
SGPDXELSS-EU-E	External trim lever with escutcheon - Entrance	1

SGPDXELSS-KAW-S

EXTERNAL TRIM LEVER WITH ESCUTCHEON

• Storeroom

Fitted with Kawneer Cylinder

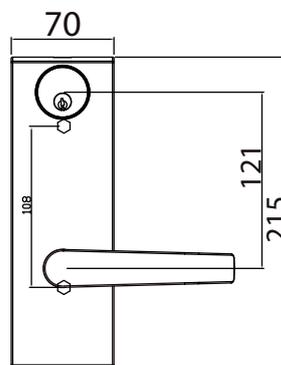


cat.-no.	Description	PACK SIZE
SGPDXELSS-KAW-S	External trim lever with escutcheon - Storeroom	1

Spare & Accesories

SGPDX55LL

EXTERNAL TRIM LEVER

- Takes PD cylinder (Supplied)



cat.-no.

Description

SGPDX55LL1

External trim lever - Entrance

SGPDX55LL2

External trim lever - Storeroom

SGDPOS710

OVERLAPPING STRIKE



cat.-no.

PACK SIZE

SGDPOS710

1

SGETR-1

EXTENSION ROD - 300MM



cat.-no.

SGPDETR-1

SGETR-2

EXTENSION ROD - 600MM



cat.-no.

SGPDETR-2



LOCKTON

Access Technology



The **LOCKTON Monitored Electric Strike** is designed to be used with all 12-28v access control systems and can be installed in both metal and wood door frames. The Electric strikes are made to be flexible, it is non-handed fully reversible with fail-safe or fail-secure operation. It also includes a latch monitor & is tested to a holding force for 680kg and endurance tested to 1 million cycles.

The **LOCKTON DSW100 Automatic Door Closer** is a versatile unit which is suitable to a wide range of applications. The DSW100 reliable performance and quiet operation makes it perfect for both residential and working environments. It also includes remote controls for non contact use and can be connected to access control systems providing extra accessibility & security.

Access Technology

SGESGK700

SGESGK700 MONITORED ELECTRIC STRIKE

PRODUCT FEATURES

- 12 ~ 28 VAC/DC
- Lock and door status outputs
- Accepts 15mm latch throw
- Keeper width 39mm
- Fail-Safe & Fail-Secure option

SPECIFICATIONS

- Operating Voltage: 12 ~ 28 DC/AC
- Current Draw: 230mA/12VDC : 140mA/28VDC (at 20°C)
- Operating Temperature: -10 ~ 45°C
- Humidity: 0~95% non-condensing
- Jaw Strength: 680kg (1500 lbs) static strength
- Tested to 1,000,000 cycles



ORDERING INFORMATION

cat.-no.	Description
SGESGK700	Electronic Strike – 12V - 24V
SGESGK700.25	Lip Extension for Electric Strike (SGESGK700) - 25mm
SGESGK700.50	Lip Extension for Electric Strike (SGESGK700) - 50mm

SGEB-454-BS

PUSH BUTTON - "PRESS TO EXIT"

- 5A/125VAC
- Momentary DPDT contacts
- Aluminium face plate



ORDERING INFORMATION

cat.-no.	Description
SGEB-454-BS	Push button - Press to Exit

SGEB-455-BS

PUSH BUTTON - "HANDICAP SYMBOL"

- 5A/125VAC
- Momentary DPDT contacts
- Aluminium face plate



ORDERING INFORMATION

cat.-no.	Description
SGEB-455-BS	Push Button - Handicap Symbol



DSW100

DSW100 – AUTOMATIC SWING DOOR SYSTEM

PRODUCT FEATURES


- The DSW100 Automatic Door Operator can be retrofitted simply and effectively on low traffic doors widely used in offices, nursing homes, commercial, industrial and domestic environments.
- Low noise operation
- B type Pull side door fixing & Push side transom fixing
- G type Pull side transom fixing & Push side door fixing
- Safe and reliable performance
- Door will immediately re-open in the reverse direction if contact is made with an obstacle or force
- Innovative mechanical design offers fast and effective installation
- Connectable to sensors, access control, safety beam protection and electric lock power output interface systems
- External Trim - Silver finish

SPECIFICATIONS


- Door configuration: Single leaf
- Limited Weight: ≤1x100kg
- Door leaf width: ≤1200mm
- Power voltage: AC 220V±10%, 50-60Hz
- Power consumption: 50W
- Opening speed: 250-450mm/S (adjustable)
- Closing speed: 250-450mm/S (adjustable)
- Opening time: 3-7S (adjustable)
- Hold-open time: 1-30S (adjustable)
- Manual force: <30N
- Swinging noise: ≤55Db
- Environment temperature: -20 ~ +50°C

CERTIFICATIONS & WARRANTY


- 12 month warranty*

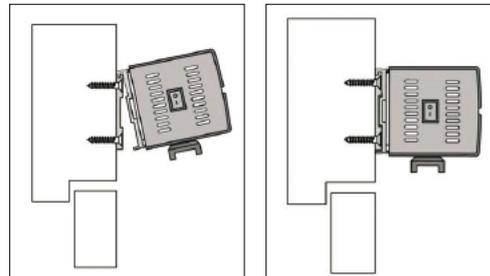

Hook plate for easy installation

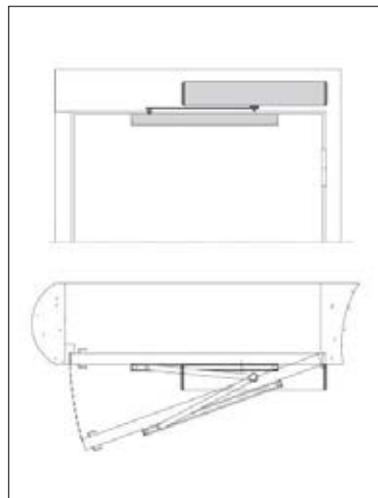

Pull Bar

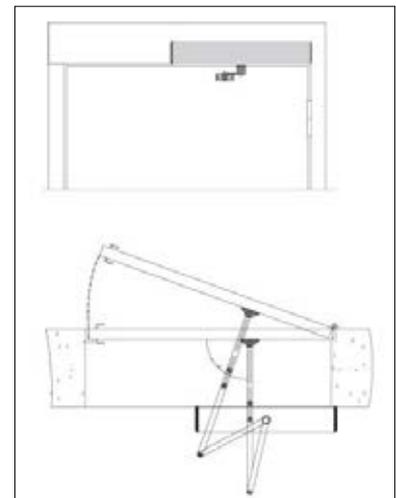

Push Bar

ORDERING INFORMATION

cat.-no.	Description
DSW100-B	Auto Door Closer. B Type (Pull)
DSW100-G	Auto Door Closer. G Type (Push)

Access Technology

DSW100-M-227B

REFLECTIVE INFRA-RED SENSOR

PRODUCT FEATURES

- The reflective infra-red sensor provides a wide and deep activation zone to assure your automatic doors are fully opened while someone is entering or exiting.
- The infra-red scan technology is universally compatible with all swinging, sliding and bifolding automatic doors

SPECIFICATIONS

- Supply voltage: 12 to 24V AC/DC $\pm 10\%$
- Detection area: 0.5 - 3m
- Detection response time: $\leq 100\text{ms}$
- Dimensions: W 620mm x H 31mm x D 20mm
- Built to IP52 standards



ORDERING INFORMATION

cat.-no.	Description
DSW100-M-227B	Infra-red Top Scan Safety Sensor

SGSU100

K BAND MICROWAVE MOTION SENSOR

PRODUCT FEATURES

- The SU100 motion sensor provides a wide and deep activation zone to assure your automatic doors are fully opened while someone is entering or exiting.
- K Band microwave technology is universally compatible with all swinging, sliding and bifolding automatic doors
- 3-D adjustable antenna assures precise activation pattern position
- Microprocessor screens out possible weather condition interference
- Remote control adjustability for ease of installation and adjustment

SPECIFICATIONS

- Supply voltage: 12 to 24V AC/DC $\pm 10\%$
- Detection area:
- Wide pattern W 3.96m to D 1.98m
- Narrow pattern W 1.98m to D 2.43m
- Minimum detection speed: 2 inches/sec
- Hold time: 0.5 to 30 sec
- Dimensions: W 120mm x H 80mm x D 50mm
- Material: ABS Plastic
- Mounting Height: Up to 4m
- Weight: 198g



ORDERING INFORMATION

cat.-no.	Description
SGSU100	'SU100' K Band Microwave Motion Sensor



Accessories

140 PIECE BARREL

DISPLAY BARREL

- Round & clear plastic barrel
- Contains 140 tags
 - 20x White
 - 20x Blue
 - 20x Yellow
 - 20x Green
 - 20x Orange
 - 20x Purple
 - 20x Red



cat.-no.	Size	Capacity
KTID5-D140	2.4L	140

175 PIECE JAR

DISPLAY JAR

- Cylindrical & clear plastic jar
- Contains 175 tags
 - 25x White
 - 25x Blue
 - 25x Yellow
 - 25x Green
 - 25x Orange
 - 25x Purple
 - 25x Red



cat.-no.	Size	Capacity
KTID5-D175	3L	175

210 PIECE HOPPER

DISPLAY HOPPER

- Clear perspex hopper
- Eye-catching display
- Contains 210 tags + additional 210 refill tags
 - 60x White
 - 60x Blue
 - 60x Yellow
 - 60x Green
 - 60x Orange
 - 60x Purple
 - 60x Red



cat.-no.	No. of key tags
KTID5-D420	210 + 210 = 420

REFILL PACK

REFILL PACK

- Refill pack for LOCKTON key tag displays
- Contains 70 key tags
 - 10x White
 - 10x Blue
 - 10x Yellow
 - 10x Green
 - 10x Orange
 - 10x Purple
 - 10x Red



cat.-no.	No. of key tags
KTID5-RF70	70
KTID5-RF175	175

Accessories

KTID5

KEY TAG WITH PAPER INSERT

PRODUCT SPECIFICATIONS

- See-through, coloured plastic
- 54mm x 28mm key tag
- Supplied with 25mm split ring



Pack of 20

ORDERING INFORMATION

cat.-no.	Colour	Size (mm)	Pack QTY
KTID5-WH	White	54 x 28	20
KTID5-BL	Blue	54 x 28	20
KTID5-YE	Yellow	54 x 28	20
KTID5-GN	Green	54 x 28	20
KTID5-OR	Orange	54 x 28	20
KTID5-PU	Purple	54 x 28	20
KTID5-RD	Red	54 x 28	20



***Warranty Information**

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.



101-109 Deakin St,
Silverwater NSW 2128
AUSTRALIA

PH : 02 9352 0600
FAX: 02 9748 0566
EMAIL: sales@siepergroup.com

www.sglocks.com.au